



Adapting Breather to your Stereotaxic Frame

Warranty

WPI (World Precision Instruments, Inc.) warrants to the original purchaser that this equipment, including its components and parts, shall be free from defects in material and workmanship for a period of 30 days from the date of receipt. WPI's obligation under this warranty shall be limited to repair or replacement, at WPI's option, of the equipment or defective components or parts upon receipt thereof f.o.b. WPI, Sarasota, Florida U.S.A. Return of a repaired instrument shall be f.o.b. Sarasota.

The above warranty is contingent upon normal usage and does not cover products which have been modified without WPI's approval or which have been subjected to unusual physical or electrical stress or on which the original identification marks have been removed or altered. The above warranty will not apply if adjustment, repair or parts replacement is required because of accident, neglect, misuse, failure of electric power, air conditioning, humidity control, or causes other than normal and ordinary usage.

To the extent that any of its equipment is furnished by a manufacturer other than WPI, the foregoing warranty shall be applicable only to the extent of the warranty furnished by such other manufacturer. This warranty will not apply to appearance terms, such as knobs, handles, dials or the like.

WPI makes no warranty of any kind, express or implied or statutory, including without limitation any warranties of merchantability and/or fitness for a particular purpose. WPI shall not be liable for any damages, whether direct, indirect, special or consequential arising from a failure of this product to operate in the manner desired by the user. WPI shall not be liable for any damage to data or property that may be caused directly or indirectly by use of this product.

Claims and Returns

• Inspect all shipments upon receipt. Missing cartons or obvious damage to cartons should be noted on the delivery receipt before signing. Concealed loss or damage should be reported at once to the carrier and an inspection requested. All claims for shortage or damage must be made within 10 days after receipt of shipment. Claims for lost shipments must be made within 30 days of invoice or other notification of shipment.

Please save damaged or pilfered cartons until claim settles. In some instances, photographic documentation may be required. Some items are time sensitive; WPI assumes no extended warranty or any liability for use beyond the date specified on the container.

• WPI cannot be held responsible for items damaged in shipment en route to us. Please enclose merchandise in its original shipping container to avoid damage from handling. We recommend that you insure merchandise when shipping. The customer is responsible for paying shipping expenses including adequate insurance on all items returned.

• Do not return any goods to WPI without obtaining prior approval and instructions (RMA#) from our returns department. Goods returned unauthorized or by collect freight may be refused. The RMA# must be clearly displayed on the outside of the box, or the package will not be accepted. Please contact the RMA department for a request form.

• Goods returned for repair must be reasonably clean and free of hazardous materials.

• A handling fee is charged for goods returned for exchange or credit. This fee may add up to 25% of the sale price depending on the condition of the item. Goods ordered in error are also subject to the handling fee.

• Equipment which was built as a special order cannot be returned.

• Always refer to the RMA# when contacting WPI to obtain a status of your returned item.

• For any other issues regarding a claim or return, please contact the RMA department

Warning: This equipment is not designed or intended for use on humans.

World Precision Instruments, Inc.

USA: International Trade Center, 175 Sarasota Center Boulevard, Sarasota FL 34240-9258 USA

Tel: 941-371-1003 • Fax: 941-377-5428 • E-mail: info@wpiinc.com • Internet: http://www.wpiinc.com

Germany: Zossener Str. 55, 10961 Berlin, Germany • Tel: 030-6188845 • Fax: 030-6188670 • E-mail: wpide@wpi-europe.com


UK: Astonbury Farm Business Centre • Aston, Stevenage, Hertfordshire SG2 7EG England • Tel: 01438-880025 • E-mail: wpiuk@wpi-europe.com

China & Hong Kong: WPI Shanghai Trading Co., Ltd. • Tel: +86 688 85517 • E-mail: ChinaSales@china.wpiinc.com

www.wpiinc.com

INSTRUCTION SHEET

Serial No. _____

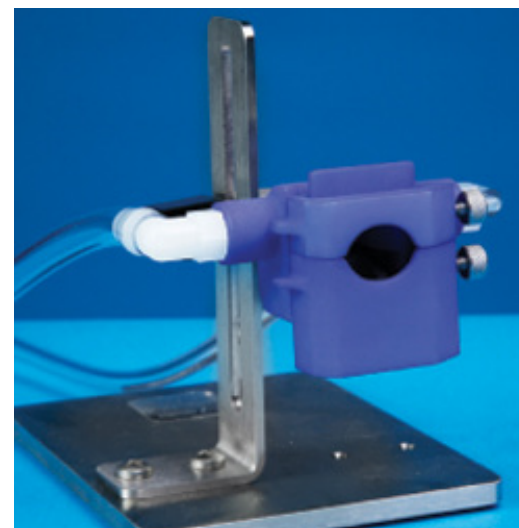

110110



WARNING: DO NOT LEAVE THE STEREOTAXIC BREATHER CONNECTED TO THE VAPORIZER'S MANIFOLD WHEN ANIMALS ARE NOT BEING USED. THE STEREOTAXIC BREATHER DOES NOT HAVE A BREATHER PLUG AND SOME ISOFLURANE MAY ESCAPE INTO THE ROOM WHILE ANIMALS ARE NOT SECURED IN THE STEREOTAXIC BREATHER.

When animals are anesthetized in the induction chamber and ready for transferring to the stereotaxic frame, follow this recommended procedures:

1. Remove the head restraint adjustment screw and spring on your stereotaxic's tooth bar. This will allow you to easily slide the stereotaxic breather onto the tooth bar.
2. On the EZ-107A stereotaxic breather, loosen the head bar screw, lower jaw screw and the slide securing screw.
3. Slide the breather onto the tooth bar and push it all the way to the back of the tooth bar.
4. Remove the animal from the induction chamber and secure the front teeth to the stereotaxic tooth bar.
5. Attach the Stereotaxic breather to the vaporizer manifold.
6. Turn down the flow meter to the induction chamber. This will direct a majority of the gas to the stereotaxic breather.
7. Slide the breather as far forward as possible and tighten the slide securing screw.
7. Adjust the lower jaw screw and head bar screw for a snug fit.
8. Adjust ear bars for a snug fit.
9. When all procedures are completed, securely shut off the isoflurane gas.

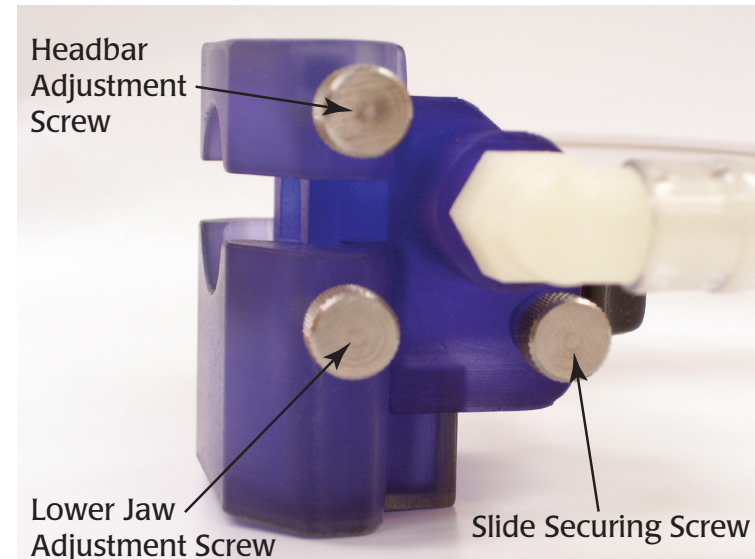


Fig. 1—EZ107A adjustment screws are labeled.